



ACOUSTIC  
HETEROGENEOUS VINYL

## Tapiflex Stairs

For a  
safer step

# Versatile colours and design effects

Original designs and colours  
for a perfect match with  
Tapiflex Excellence 65.

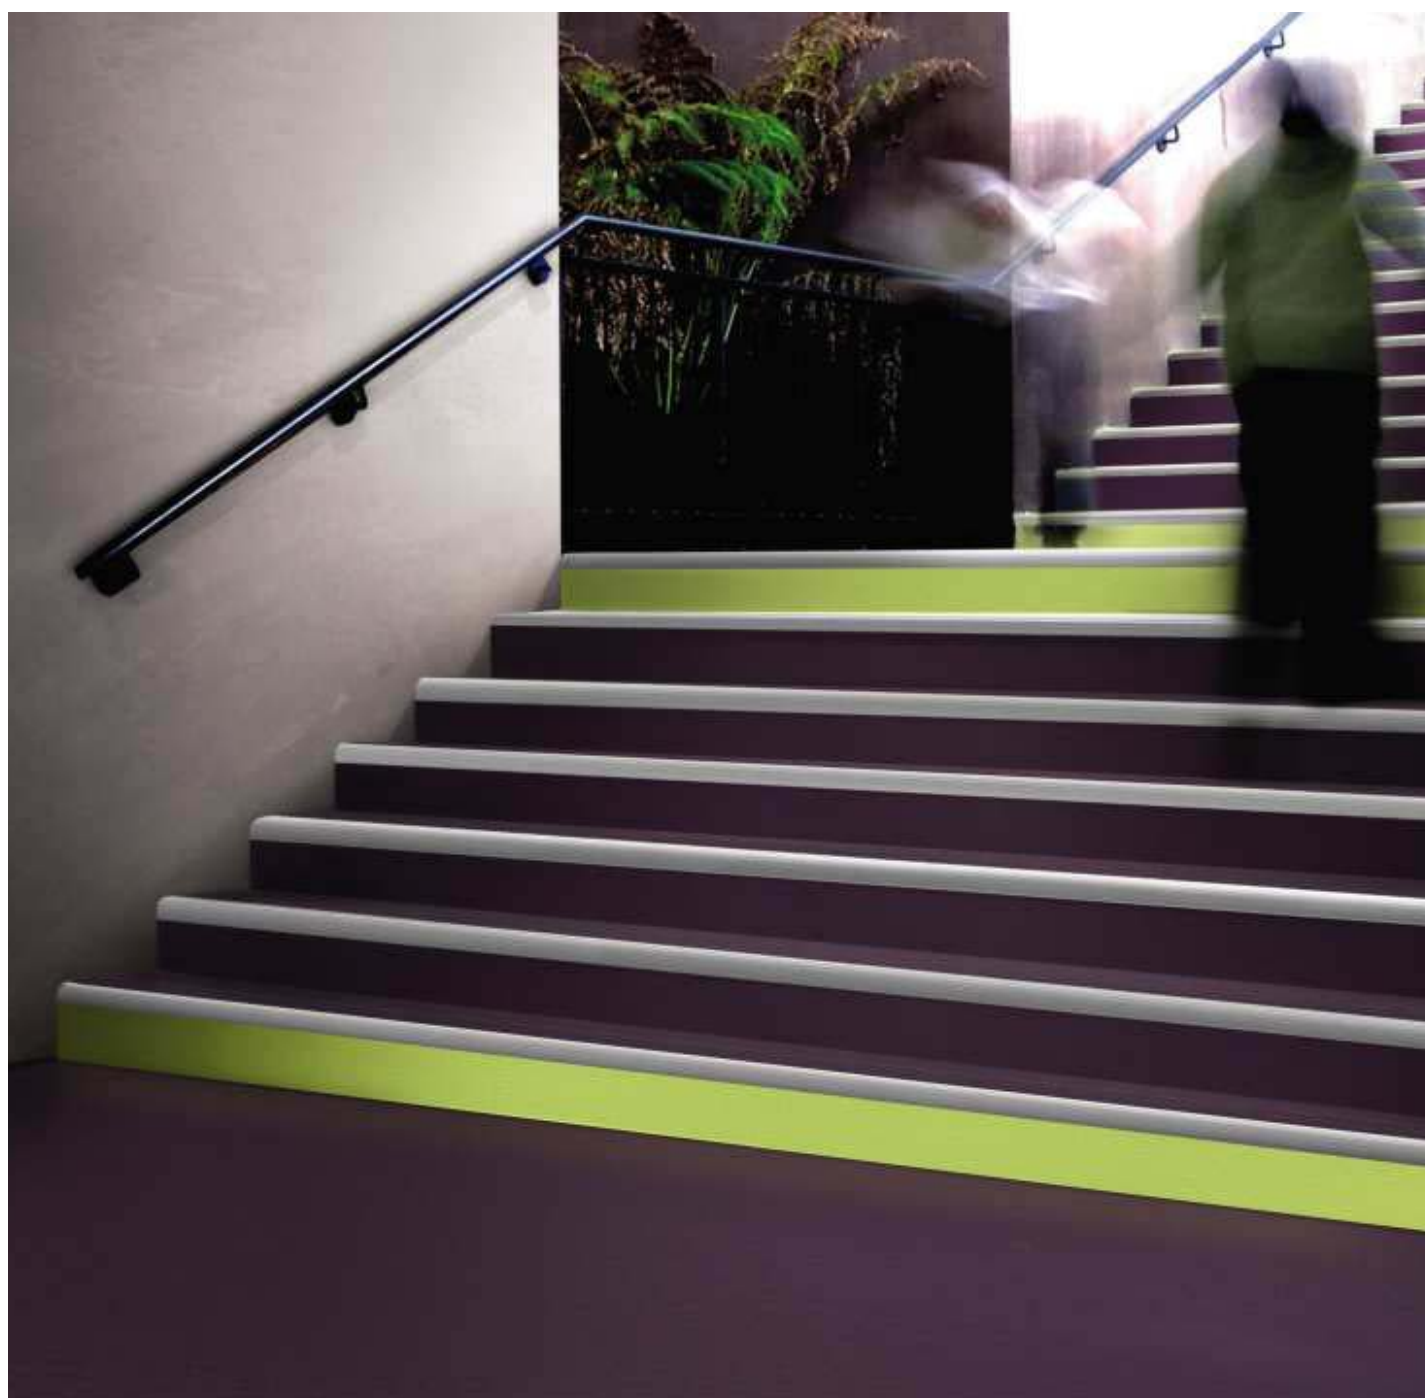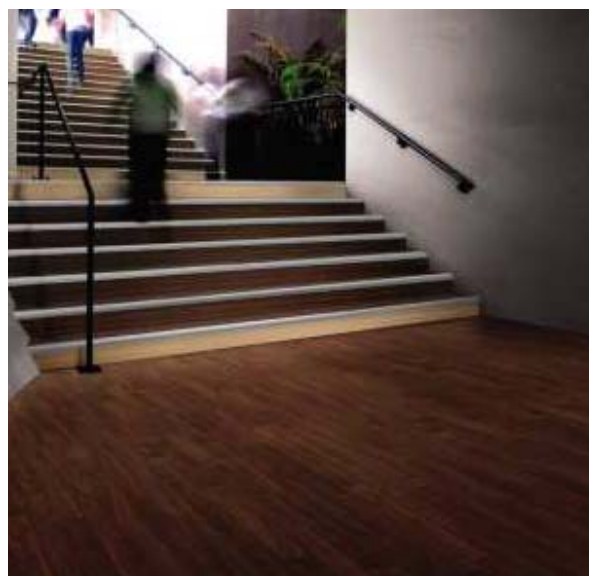

# For a safer step with Tapiflex Stairs

**50%+**  
natural raw  
materials

**20%+**  
recycled  
material

**100 %**  
recyclable

**usine**  
ISO 14001  
certified  
factories

For an easier and safer access to your premises, Tarkett has developed a range of vinyl floorcoverings for stairs that meet the latest safety norms and offer unique designs.

## ■ Safety above all and a solution for any situation

Tapiflex Stairs is the result of very recent studies and developments concerning optimum safety and accessibility in public buildings, especially for the visually impaired:

- Contrastive nosing for easier detection by the visually impaired and greater visibility in poorly-lit areas. The nosing contrast varies from 40 to 70% for the entire product line, with siw "Contrast+" products offering over 50% contrast,
- Visually contrasting risers, with turnkey solution, including inverted colours, stripes, etc.
- Specially designed ridges to increase slip resistance,
- Elastic foam backing to cushion impact in the event of falling and to reduce noise.

## ■ Optimal performance

- Extreme resistance to scratches and abrasion: 1mm thick pure PVC solid surface with TOPCLEAN XP™ surface treatment,
- Excellent resistance to scuffing, soiling and staining.

## ■ Unique designs

- **17 colours** developed entirely from the Tapiflex range and Acccent Excellence ranges, matching stairs and staircase landings perfectly: Uni or Matrix<sup>2</sup>, Wood or Concrete,
- Perfectly sized stair nosing to offer safety without compromising looks,
- Possible match with other Tarkett collections,
- Stair borders for perfect finish.



Tapiflex Stairs is part of Tarkett's choice of sustainable solutions, an integrated system that allows for balancing all the competing needs, while making choices that are truly sustainable and work together aesthetically.



### BETTER MATERIALS

Tarkett uses renewable and natural materials whenever possible.

Increasing the level of natural and re-newable materials is the touchstone for new product development. We also regularly review the formulation of existing products to improve their natural and renewable content.



### RESOURCE STEWARDSHIP

Our production facilities are ISO 9001 and 14001 certified and are independently audited for environmental risk. Our production facilities monitor five key indicators quarterly: energy consumption, VOC emissions, waste, water consumption and recycling.



### PEOPLE-FRIENDLY SPACES

Tarkett makes flooring solutions that provide safe, healthy environments. We systematically evaluate all our flooring for its contribution to indoor air quality, and provide surface treatments that reduce the need for water, detergents and energy for cleaning.



### REUSE AND RECYCLE

We reuse recycled content in our products. We have the largest recycling operation in the flooring industry. In 2008, we diverted over 68,000 tons of flooring products from landfill.

Tapiflex and Acccent Excellence are part of Tarkett's choice of sustainable solutions, an integrated system that allows for balancing all the competing needs, while making choices that are truly sustainable and work together aesthetically.

## Pedotactile tile for maximum security


This rubber tile has raised ribs and acts as a tactile warning surface to help recognizing a change in level by the visually impaired. The tile should contrast in colour with the surrounding floor covering to ensure clear visibility.

### ■ Pedotactile tile


- Length = 80 cm, width = 42 cm,
- Total thickness = 7 mm,
- Thickness of the base = 2 mm (with outer beveling),
- Thickness of pins = 5 mm (with wear indicator),

### Colours/ RAL

### References

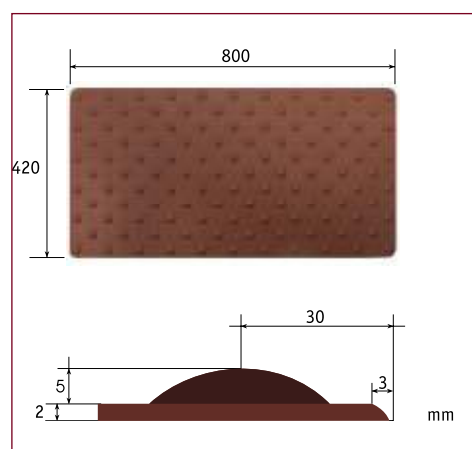

Colours/ RAL	References
White/9010	1431 001
Black/9004	1431 002
Gray/7035	1431 003
Beige/1015	1431 004
Green/6032	1431 005
Yellow/1033	1431 006
Red/3003	1431 007

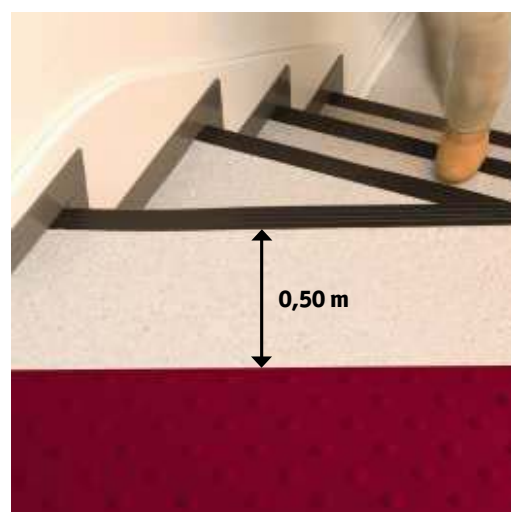

## Stair borders for a perfect finish

SB1 and SB2 corners are designed to form a neat and attractive edge around the open end of a step, by concealing the edge of the floorcovering and stair edging.



### Colours/RAL

### SB1 Inside

### SB2 Outside

Black/1500	1432 004	1433 004
Medium grey/5000	1432 005	1433 005
Light grey/7500	1432 006	1433 006
Light beige/0708010	1432 007	1433 007

### ■ Stair borders

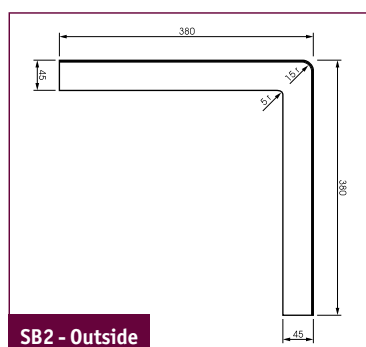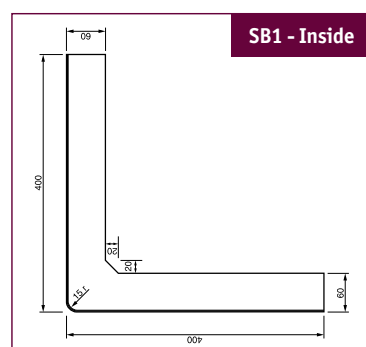




# Optimal technical performances

For an easier and safer access to your premises, Tarkett has developed a range of vinyl floorcoverings for stairs that meet the latest norms.



## ■ Tapiflex Stairs



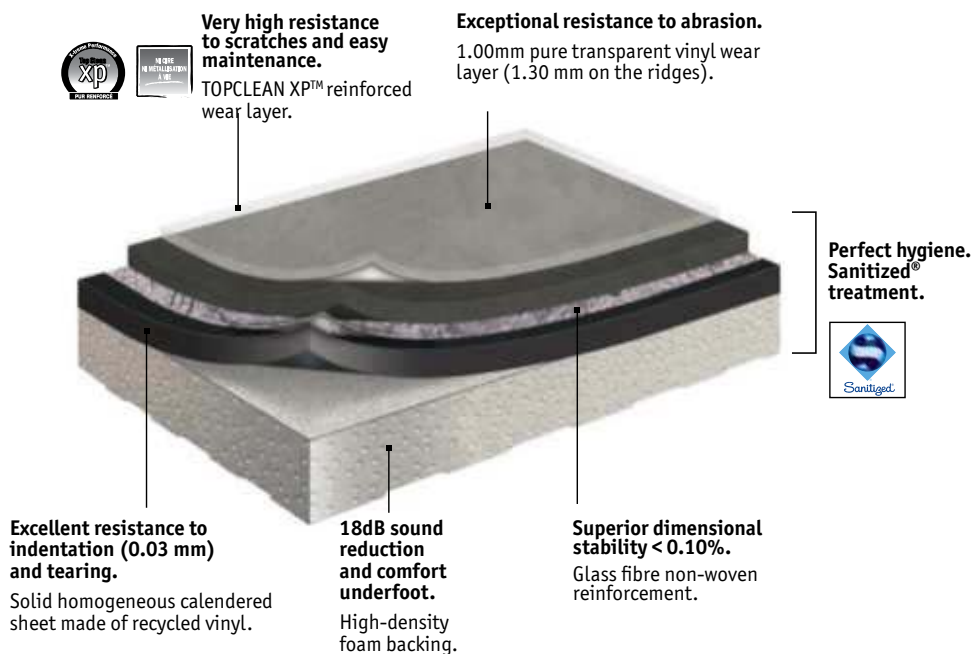





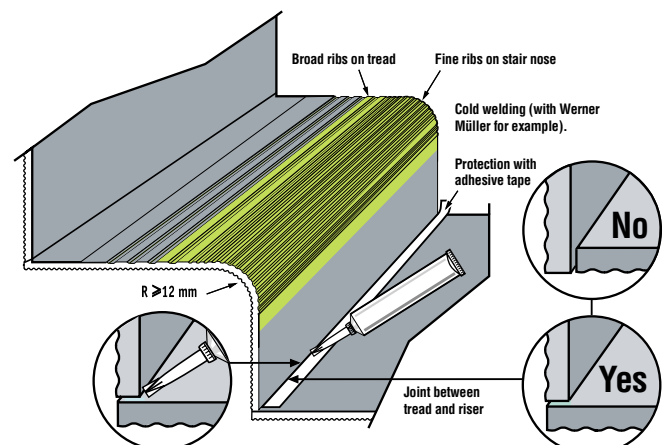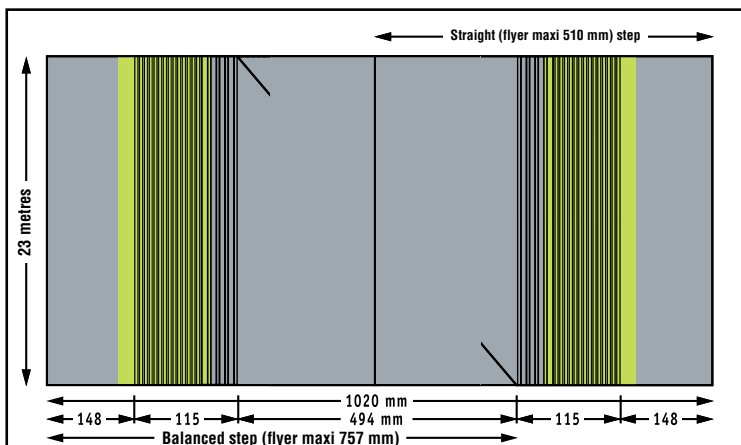































































Tapiflex Stairs is a vinyl floorcovering incorporating a pre-formed tread riser and nosing into a one-piece floorcovering for stairs. The product has foam backing with a wear surface that is protected with TOPCLEAN XP™ PUR reinforcement. It has also a Sanitized® fungi and bacteriostatic treatment for perfect hygiene.

















































## Installation procedure

Roll size is 102 cm x 23 m  
(102 cm is to be cut into two; giving two rolls of 51 cm x 23 m).



CONTRAST RATE		TAPIFLEX STAIRS	PERFECT MATCH WITH TAPIFLEX EXCELLENCE	POSSIBLE MATCH WITH TAPIFLEX EXCELLENCE							
48%	Phosphorescent stair nose	 3862 107 - Grey/Anis	 Warm Grey								
		 3862 001 - Security Grey/Anis									
		 3862 106 - Anis/Grey	Anis	Uni	Flocons	Flocons	Matrix²	Pixel	Led		
72% Contrast +	UNI	 3862 104 - Dark Grey	 Anthracite								
											
48%		 3862 108 - Orange	 Orange								
48%		 3862 103 - Warm Grey	 Warm Grey								
											
74% Contrast +		 3862 109 - Purple	 Purple								
67% Contrast +		 3862 110 - Chocolate	 Chocolate								
											
48%		 3862 111 - Grey beige	 Grey beige								

CONTRAST RATE		TAPIFLEX STAIRS	PERFECT MATCH WITH TAPIFLEX EXCELLENCE	POSSIBLE MATCH WITH TAPIFLEX EXCELLENCE					
50%	ALU	 3862 105 - Grey		 Uni	 Uni	 Washed Oak	 Bamboo	 Cabreuva	 Matrix²
				 Concrete	 Pixel	 Flocons			
53%	WOOD	 3861 002 - Light Beech	 Light Beech	 Esquisse	 Concrete	 Coco Sisal			
74% Contrast +		 3861 003 - Rose Wood	 Rose Wood	 Light Beech	 American Oak				
57%	CONCRETE	 3861 001 - Grey	 Grey	 Oak	 Ipé	 Concrete			
69% Contrast +	ESQUISSE	 3861 015 - Dark Grey	 Dark Grey	 Esquisse	 Esquisse				
43%		 3861 017 - Medium Brown	 Medium Brown	 Washed Oak	 Washed Oak	 Esquisse	 Esquisse	 Esquisse	
41%		 3861 014 - Medium Grey	 Medium Grey	 Esquisse	 Esquisse	 Esquisse	 Steel		
59%		 3861 007 - Dark Red	 Dark Red	 Doussié	 Merbau	 Ship Deck			

HETEROGENEOUS  
ACOUSTIC VINYL

## Tapiflex Stairs


### Specification

Printed acoustic vinyl floorcovering with high density foam backing on a glass fibre stabilized carrier, filler free wear layer. PUR reinforcement, built in fungistatic and bacteriostatic Sanitized® treatment. Product standard : EN 651.

CERTIFICATION & CLASSIFICATION	STANDARDS	Tapiflex Stairs
Type of floorcovering	EN 651	Heterogeneous acoustic vinyl
CE Certification	EN 14041	Yes
Classification UPEC		U4P3E2C2
Impact sound reduction	EN ISO 140-8 EN ISO 717-2	$\Delta L_w$ 18 dB
Acoustical Improvement	NF S31-074	$L_{n,e,w}$ = 61 dB
Certificat NF UPEC.A+	NF 189	305-032.1
Classification	EN 685	34
TECHNICAL CHARACTERISTICS	STANDARDS	Tapiflex Stairs
Wear layer thickness	EN 429	1.00mm
Surface Treatment		TopClean XP
Total thickness	EN 428	3.50 mm
Abrasion Group	EN 660-1	Group T : $\leq$ 0.08 mm
Total weight	EN 430	3 670 g/m <sup>2</sup>
Form of delivery	EN 426 Sheet (rolls)	approx. 23 running metres x 1.02 m
TECHNICAL PERFORMANCES	STANDARDS	Tapiflex Stairs
Dimensional stability	EN 434	< 0.10%
Reaction to fire	EN 13501-1	B <sub>n</sub> s1 on fibreceement substrate A2 <sub>n</sub> C <sub>n</sub> s1 on woodchip substrate
Static indentation	EN 433	0.17 mm
Castor chair	EN 425	No damage
Underfoot comfort	EN 433	$\geq$ 0.40 mm
Furniture leg	EN 424	No damage
Curl resultant to heat	EN 434	$\leq$ 8 mm
Electrostatic properties	EN 1815 EN 1081 EN 14041	< 2 kV $R_1 > 10^{10} \Omega$ Antistatic on concrete
Fungi static and bacteria static effect	NF EN ISO 846	Sanitized®
Chemical resistance	EN 423	High resistance
Thermal resistance Underfloor heating	EN 12524	0,05 m <sup>2</sup> K/W Suitable
Light fastness	EN ISO 105-B02	$\geq$ 6/8
Slip resistance	DIN 51130 EN 13893	R10 $\geq$ 0.3
Colours		17

The above information is subject to modification for the benefit of further improvement. (01/10).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



**Australia:** Tarkett Australia Pty Ltd - Tel. +61 2 96 34 73 73 • **Austria:** Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 478 80 62 • **Baltic States:** Tarkett Wyk\_adziny Sp. z o.o. - Tel. +370 37 262 220 • **Belgium:** S.A. Tarkett NV - Tel. +32 16 35 98 80 • **Brazil:** Tarkett FADEMAG - Tel. + 55 12 3954 7244 • **Canada:** Tarkett Inc. - Tel. +1 450 293 173 • **China:** Tarkett Asia Pacific Limited - Shanghai Representative Office - Tel. +86 21 60 95 6838 / +86 21 6095 6859 • **Czech Republic:** Tarkett SAS, org. slozka - Tel. +420 271 001 602 • **Denmark:** Tarkett A/S - Tel. +45 43 90 60 11 • **Finland:** Tarkett Oy - Tel. +358 9 5406 5870 • **France:** Tarkett France - Tel. +33 1 41 20 42 49 • **Germany:** Tarkett Holding GmbH, Bereich Objekt - Tel. +49 (0) 62 33 810 • **Greece:** Tarkett Monoprosopi Ltd - Tel. +30 2 10 576 3889 • **Hong Kong:** Tarkett Asia Pacific Ltd. - Tel. +852 251 18 716 • **Hungary:** Tarkett SAS -Tel. +36 1 437 8150 • **Italy:** Tarkett S.p.A. - Tel. +39 02 893 411 • **Luxembourg:** Tel. +352 949 211 8804 • **Middle East:** Tarkett Middle East - Tel. +961 151 3363/4 • **Netherlands:** Tarkett Holding GmbH – Vestiging Nederland - Tel. +31 76 57 80 760 • **Norway:** Tarkett AS - Tel. +47 32 20 92 00 • **Poland:** Tarkett Wyk\_adziny Sp. z o.o. - Tel. +48 22 639 31 66 • **Portugal:** Tarkett SA - Tel. +351 21 427 64 20 • **Russian Federation:** Tarkett Russia - Tel. +7 4 95 777 69 83 • **Slovakia:** Tarkett SAS - Tel. +421 248 291 317 • **Singapore:** Tarkett Far East - Tel. +65 67 43 53 84 • **South East Europe:** Tarkett Trade d.o.o. - Tel. +381 21 7557 649 • **Spain:** Tarkett Floors S.L - Tel. +34 91 358 00 35 • **Sweden:** Tarkett Sverige AB - Tel. +46 771 25 19 00 • **Switzerland:** Tarkett Holding GmbH, Bereich Objekt Schweiz - Tel. +41 (0) 43 233 79 24 • **Turkey:** Tarkett ASPEN - Tel. +90 212 213 65 80 • **Ukraine:** Tarkett UA - Tel. +380 (44) 569 12 21 • **United Kingdom:** Tarkett Ltd - Tel. +44 (0) 1622 854 040 • **North America:** Johnsonite - Tel. +1 440 543 8916 • Tarkett Inc. USA - Tel. +1 713 869 5811 • **Latin America:** Tarkett FADEMAG - Tel.+ 55 12 3954 7244 • **Tarkett International:** Tel. +33 1 41 20 41 01



THE ULTIMATE  
FLOORING EXPERIENCE